

M8 fem. 90° a saldare

4 poli 0,25mm²

Femmina 90°
M8, 4 poli
con perni a saldare
Sezione cavo: max. 0.25 mm²

Link al prodotto

Immagine



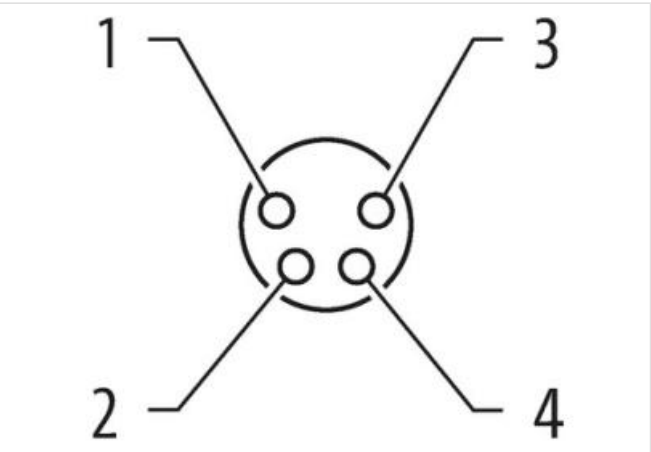


Immagine rappresentativa

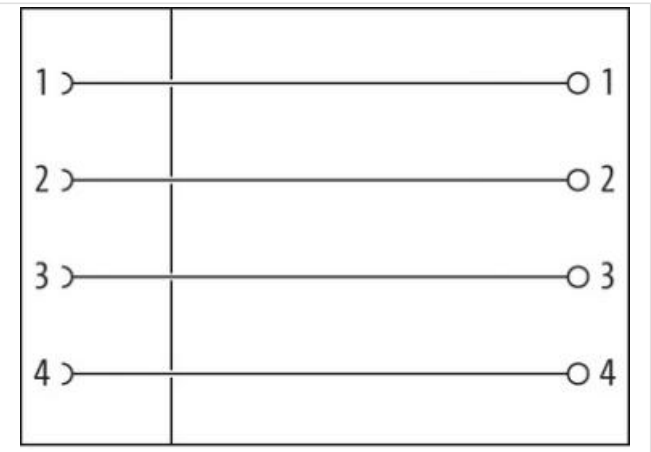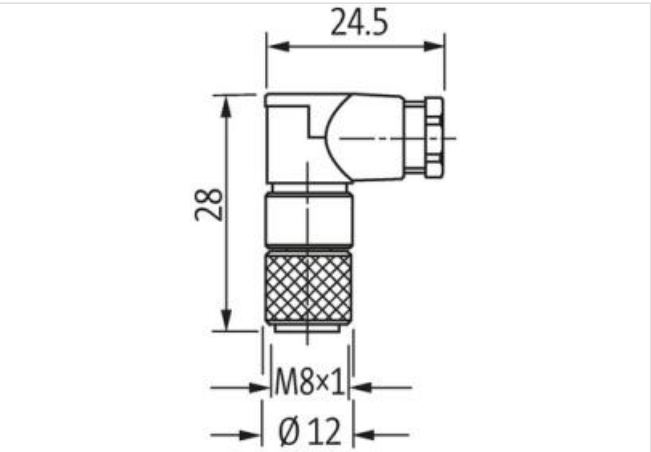

Family construction form	M8
Grado di protezione (EN CEI 60529)	IP67
dati commerciali	
ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC001855

GTIN	4048879224598
------	---------------

Lotto minimo ordinabile	1
-------------------------	---

Numero di tariffa doganale	85366990
----------------------------	----------

Dati elettrici | Alimentazione

Tensione di esercizio CA max	30 V
------------------------------	------

Tensione di esercizio CC max	30 V
------------------------------	------

Corrente di esercizio per ciascun contatto max	4 A
--	-----

Dati tecnici | Installazione

Sezione di collegamento max	0,25 mm ²
-----------------------------	----------------------

Rotation option	90° (4 coding options)
-----------------	------------------------

Protezione dei dispositivi | Elettrica

Condizione aggiuntiva grado di protezione	inserito, Avvitato
---	--------------------

Dati meccanici | Dati di montaggio

Campo di serraggio min	3,5 mm
------------------------	--------

Campo di serraggio max	5 mm
------------------------	------

Altezza	28 mm
---------	-------

Larghezza	18,5 mm
-----------	---------

Profondità	12 mm
------------	-------

Caratteristiche ambientali | Climatiche

Temperatura di esercizio min	-25 °C
------------------------------	--------

Temperatura di esercizio max	85 °C
------------------------------	-------

Important installation notes

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	---

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	---